



Front view :

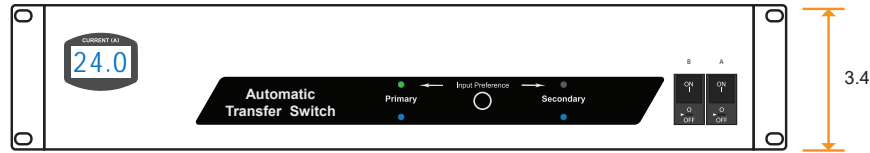

Rear view :

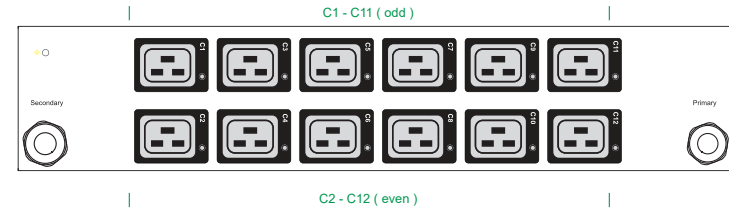

30A model :	Fuse	MCB
ATS-H12C19-30A_L630	-	2



- Input Rating : 30A, 208V
- Inlet : 30A NEMA L6-30P plug x 2
- Cordset : 9.8ft UL 10AWG cordsetx 2
- Protection : 16A single pole hydraulic MCB x 2
- Circuit Details : < **Circuit A** > Output 12A max. C 19 # C1 - C11 (odd)
< **Circuit B** > Output 12A max. C 19 # C2 - C12 (even)

Automatic transfer switch

Outlet : 16A Rated C19 x 12



The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2021 Austin Hughes Electronics Ltd. All rights reserved.

ATS Specification :

- Nominal input voltage : 208V
- Acceptable input voltage : ±10% nominal
- Input frequency : 50 / 60Hz
- Transfer time : 10-16ms typical
- Electrical endurance : 1 x 10⁵ operations
- Power consumption : Approx. 20W

Meter Features

- Local Display : 3-digit LED ammeter measuring input load current
- Measurement : Current (A)
- Accuracy : ± (3% of the reading + 5 digits) RMS

- Operating Temperature : -5 to 60 °C
- Storage Temperature : -25 to 65 °C
- Operating Altitude : 0 to 2,000 m
- Storage Altitude : 0 to 15,000 m
- Humidity : 8 to 95% RH, non-condensing

- EMC Compliance : FCC Part 15 Subpart B
- Safety Compliance : Tested to UL standard
- Environment Compliance : RoHS3 & REACH

- Chassis Material : Steel
- Chassis Color : Black

- Product Dimension : 17.4 (W) x 10.6 (D) x 3.4 (H) inch
- Net Weight : 14.3 lbs

- Packing Dimension : 21.3 (W) x 21.3 (D) x 5.9 (H) inch
- PDU Gross Weight : 15.4 lbs