


PDU specification drawing

1-Phase 230V 32A metered PDU : UK x 12

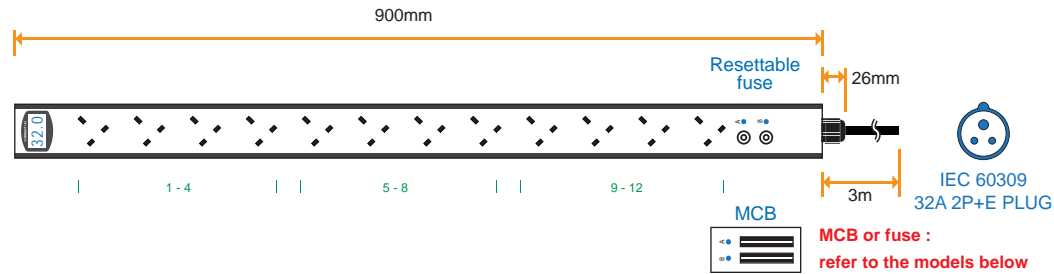

32A model :	Fuse	MCB
V12UK135-32A-MD/F_EN/3B-1	2	-
V12UK135-32A-MD/CR_EN/3B-1	-	2

Input Rating : 32A, 230V
 Inlet : 32A IEC60309 2P+E plug
 Cordset : 3 meter 4mm sq. H05V V-F cordset
 Protection : 16A resettable fuse or 16A hydraulic MCB x 2
 Circuit Details : < **Circuit A** > Output 16A max. U K # 1 - 6
 : < **Circuit B** > Output 16A max. U K # 7 - 12

Single phase metered PDU
Outlet : 13A Rated BS1363 x 12

Design. Manufacturing. Global Services.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2017 Austin Hughes Electronics Ltd. All rights reserved.

Meter Features (MD metered PDU)

Local Display : 3-digit LED ammeter measuring input load current
 Measurement : Current (A)
 Accuracy : ± (3% of the reading + 5 digits) RMS

EMC Compliance : FCC & CE certified
 Safety Compliance : CE / LVD certified
 Environment Compliance : RoHS2 & REACH

Operating Temperature : -5 to 60 °C
 Storage Temperature : -25 to 65 °C
 Operating Altitude : 0 to 2,000 m
 Storage Altitude : 0 to 15,000 m
 Humidity : 8 to 95% RH, non-condensing

Dimension : 60 (W) x 60 (D) x 900 (H) mm
 Material : Extrusion
 Color : Black