


1-Phase monitored PDU specification drawing

208V 20A / 30A PDU : C13 x 24

unit : inch

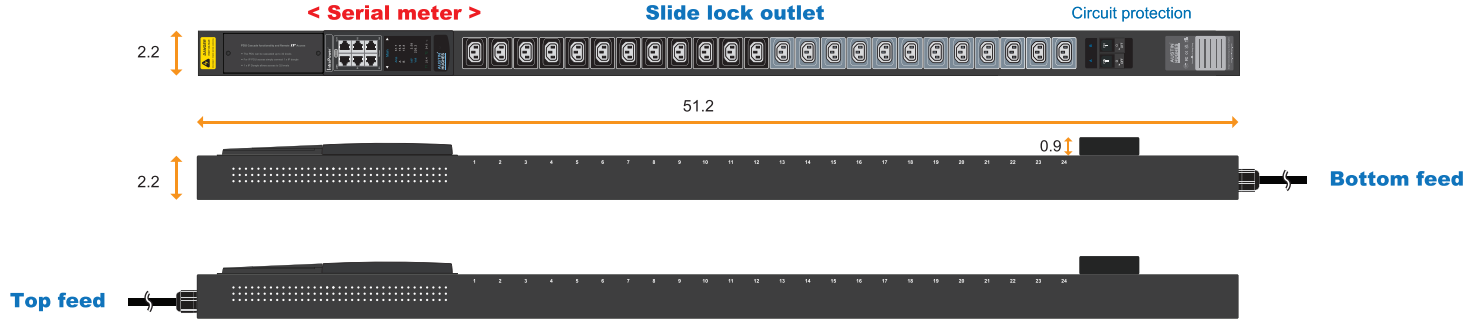

Circuit Protection	Code
Fuse	F
MCB	CR

PDU Feed	Code
Bottom	B
Top	T



30A model :	Circuit Protection
V24L13-30A-M/ F _L630/3 B -1	Resettable Fuse x 2
V24L13-30A-M/ CR _L630/3 T -1	1-pole MCB x 2

Input Rating : 30Amp, 208V
Cordset : 10 feet UL SJT 10 AWG cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 2
Circuit A : Output 12A max., C13 #1-12
Circuit B : Output 12A max., C13 #13-24
Weight : Net - lb / Gross - lb

Slide Lock Outlet Color	Color
	Black
	Grey
	White
	Red
	Blue
	Green

Chassis Color	Code
	Black 1
	White 2
	Red 3
	Blue 4
	Green 5
	Orange 6
	Yellow 7
	Purple 8



20A model :	Circuit Protection
V24L13-20A-M/ F _L620/3 B -1	Resettable Fuse x 1
V24L13-20A-M/ CR _L620/3 T -1	1-pole MCB x 1

Input Rating : 20Amp, 208V
Cordset : 10 feet UL SJT 12 AWG cordset
Protection : 20A resettable fuse or 20A hydraulic MCB x 1
Circuit : Output 16A max., C13 #1-24
Weight : Net - lb / Gross - lb

Standard color
Single circuit : Black
Dual circuit : Black / Grey

Standard color: Black

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity : 8 to 95% RH, non-condensing

Meter Features (M4 Monitored PDU)

Local Display : Field replaceable 2.8" color LCD with touchscreen
Bank Measurement : Current (A), Energy (kWh), Voltage (V) & Power factor
Accuracy : ±1% Billing-grade
IP connection : via IP Meter PDU or IP dongle
Cascade : Up to 32 PDU under single IP address
USB-C function port x 1 : Support Wi-Fi, firmware update, backup power for meter
Sensor Port x 4 : Temp. Sensor / Temp. + Humid. Sensor / Door Sensor (support daisy chain sensors up to 4)

IP dongle (option)

- Dual LAN Network Failover
- 10/100 Ethernet & Gigabit Ethernet standard
- Enterprise IP Authentication, LDAPv3 / LDAPS, Active Directory®, RADIUS protocol

EMC Compliance : FCC Part 15 Subpart B (Class A)
Safety Compliance : Tested to UL 60730-1:2016 and CAN / CSA-E60730-1:2015
Tested to UL 62368-1:2014 and CAN / CSA-C22.2 No. 62368-1:2014
Environment Compliance : RoHS3 & REACH

Product Dimension : 2.2 (W) x 2.2 (D) x 51.2 (H) inch
Packing Dimension (for 2 PDUs) : 4.3 (W) x 10.6 (D) x 70.1 (H) inch