


1-Phase metered PDU specification drawing

208V 20A / 30A PDU : Combo C13/C19 x 12

unit : inch

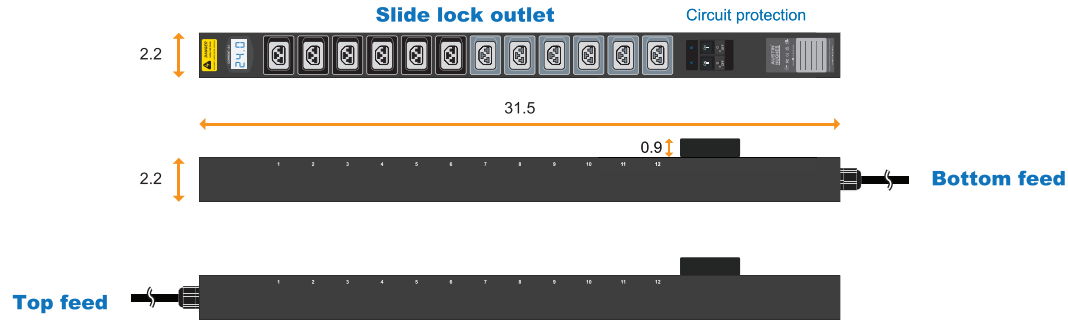

Circuit Protection	Code
Fuse	F
MCB	CR

PDU Feed	Code
Bottom	B
Top	T

Slide Lock Outlet Color	Code
Black	1
Grey	2
White	3
Red	4
Blue	5
Green	6

Chassis Color	Code
Black	1
White	2
Red	3
Blue	4
Green	5
Orange	6
Yellow	7
Purple	8

Standard color
Single circuit : Black
Dual circuit : Black / Grey

Standard color: Black



NEMA L6-30P

30A model :	Circuit Protection
V12X19-30A-MD/ F _L630/3 B-1	Resettable Fuse x 2
V12X19-30A-MD/ CR _L630/3 T-1	1-pole MCB x 2

Input Rating : 30Amp, 208V
Cordset : 10 feet UL SJT 10 AWG cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 2
Circuit A : Output 12A max., Combo C13/C19 #1-6
Circuit B : Output 12A max., Combo C13/C19 #7-12
Weight : Net - lb / Gross - lb



NEMA L6-20P

20A model :	Circuit Protection
V12X19-20A-MD/ F _L620/3 B-1	Resettable Fuse x 1
V12X19-20A-MD/ CR _L620/3 T-1	1-pole MCB x 1

Input Rating : 20Amp, 208V
Cordset : 10 feet UL SJT 12 AWG cordset
Protection : 20A resettable fuse or 20A hydraulic MCB x 1
Circuit : Output 16A max., Combo C13/C19 #1-12
Weight : Net - lb / Gross - lb

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity : 8 to 95% RH, non-condensing

Meter Features (MD metered PDU)
Local Display : 3-digit LED ammeter measuring input load current
Measurement : Current (A)
Accuracy : ± (3% of the reading + 5 digits) RMS

EMC Compliance : FCC Part 15 Subpart B (Class A)
Safety Compliance : Tested to UL 60730-1:2016 and CAN / CSA-E60730-1:2015
Tested to UL 62368-1:2014 and CAN / CSA-C22.2 No. 62368-1:2014
Environment Compliance : RoHS3 & REACH