


1-Phase metered PDU specification drawing

208V 20A / 30A PDU : C13 x 8 + Combo C13/C19 x 4

unit : inch

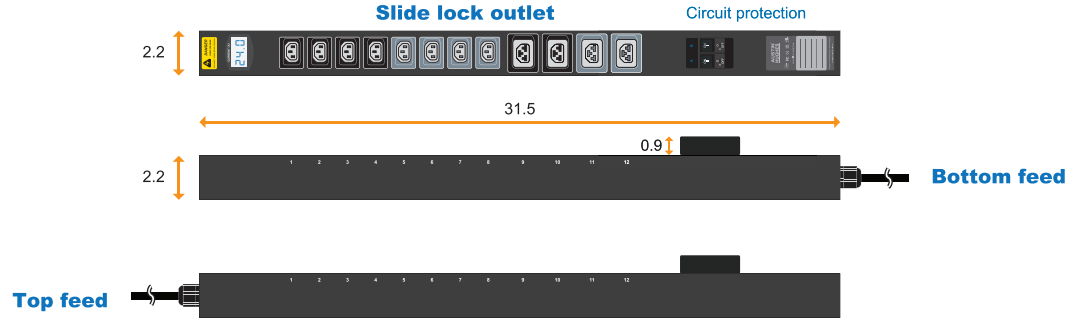

Circuit Protection	Code
Fuse	F
MCB	CR

PDU Feed	Code
Bottom	B
Top	T



30A model :	Circuit Protection
V8L13/4X19-30A-MD/ F_L630/3B-1	Resettable Fuse x 2
V8L13/4X19-30A-MD/ CR_L630/3T-1	1-pole MCB x 2

Input Rating : 30Amp, 208V
 Cordset : 10 feet UL SJT 10 AWG cordset
 Protection : 16A resettable fuse or 16A hydraulic MCB x 2
 Circuit A : Output 12A max., C13 #1-4 + Combo C13/C19 #9-10
 Circuit B : Output 12A max., C13 #5-8 + Combo C13/C19 #11-12
 Weight : Net - lb / Gross - lb

Slide Lock Outlet Color	Code
Black	1
Grey	2
White	3
Red	4
Blue	5
Green	6

Chassis Color	Code
Black	1
White	2
Red	3
Blue	4
Green	5
Orange	6
Yellow	7
Purple	8

Standard color
 Single circuit : Black
 Dual circuit : Black / Grey

Standard color: Black



20A model :	Circuit Protection
V8L13/4X19-20A-MD/ F_L620/3B-1	Resettable Fuse x 1
V8L13/4X19-20A-MD/ CR_L620/3T-1	1-pole MCB x 1

Input Rating : 20Amp, 208V
 Cordset : 10 feet UL SJT 12 AWG cordset
 Protection : 20A resettable fuse or 20A hydraulic MCB x 1
 Circuit : Output 16A max., C13 #1-8 + Combo C13/C19 #9-12
 Weight : Net - lb / Gross - lb

Operating Temperature : -5 to 60 °C
 Storage Temperature : -25 to 65 °C
 Operating Altitude : 0 to 2,000 m
 Storage Altitude : 0 to 15,000 m
 Humidity : 8 to 95% RH, non-condensing

Meter Features (MD metered PDU)
 Local Display : 3-digit LED ammeter measuring input load current
 Measurement : Current (A)
 Accuracy : ± (3% of the reading + 5 digits) RMS

EMC Compliance : FCC Part 15 Subpart B (Class A)
 Safety Compliance : Tested to UL 60730-1:2016 and CAN / CSA-E60730-1:2015
 Tested to UL 62368-1:2014 and CAN / CSA-C22.2 No. 62368-1:2014
 Environment Compliance : RoHS3 & REACH