


# 3-Phase metered PDU specification drawing

400V 16A / 32A PDU : Combo C13/C19 X 24

unit : mm

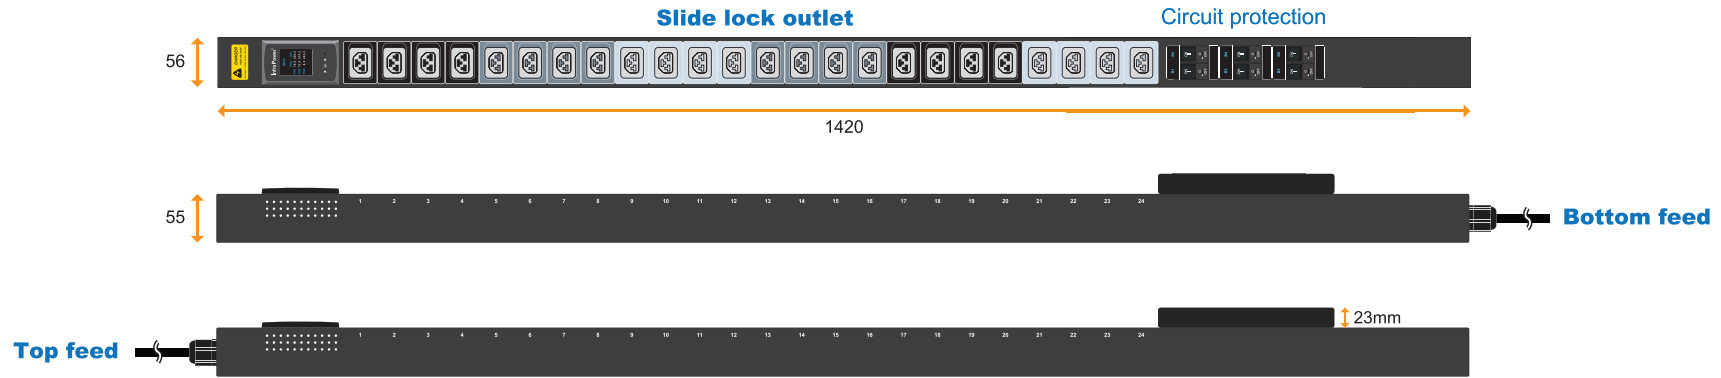

Circuit Protection	Code
Fuse	<b>F</b>
MCB	<b>CR</b>

PDU Feed	Code
Bottom	<b>B</b>
Top	<b>T</b>



32A model :	Circuit Protection
VP24X19-32A-MK/ <b>F</b> _EN/2 <b>B</b> -1	Resettable Fuse x 6
VP24X19-32A-MK/ <b>CR</b> _EN/2 <b>T</b> -1	1-pole MCB x 6

Input Rating : 32Amp, 400V 3PH  
Cordset : 5-wire 2 meter 4mm sq. H05V V-F cordset  
Protection : 16A resettable fuse or 16A single pole hydraulic MCB x 6  
Bank 1 - PH-1 : Output 16A max., Combo C13/C19 #1-4  
Bank 2 - PH-2 : Output 16A max., Combo C13/C19 #5-8  
Bank 3 - PH-3 : Output 16A max., Combo C13/C19 #9-12  
Bank 4 - PH-1 : Output 16A max., Combo C13/C19 #13-16  
Bank 5 - PH-2 : Output 16A max., Combo C13/C19 #17-20  
Bank 6 - PH-3 : Output 16A max., Combo C13/C19 #21-24  
Weight : Net - Kg / Gross - Kg

Slide Lock Outlet Color	Color
	Black
	Grey
	White
	Red
	Blue
	Green

Chassis Color	Color	Code
	Black	<b>1</b>
	White	<b>2</b>
	Red	<b>3</b>
	Blue	<b>4</b>
	Green	<b>5</b>
	Orange	<b>6</b>
	Yellow	<b>7</b>
	Purple	<b>8</b>



16A model :	Circuit Protection
VP24X19-16A-MK/ <b>F</b> _EN/2 <b>B</b> -1	Resettable Fuse x 3
VP24X19-16A-MK/ <b>CR</b> _EN/2 <b>T</b> -1	1-pole MCB x 3

Input Rating : 16Amp, 400V 3PH  
Cordset : 5-wire 2 meter 1.5mm sq. H05V V-F cordset  
Protection : 16A resettable fuse or 16A single pole hydraulic MCB x 3  
PH-1 : Output 16A max., Combo C13/C19 #1-4,13-16  
PH-2 : Output 16A max., Combo C13/C19 #5-8,17-20  
PH-3 : Output 16A max., Combo C13/C19 #9-12,21-24  
Weight : Net - Kg / Gross - Kg

Standard color  
Single circuit : Black  
Dual circuit : Black / Grey

Standard color : Black

Operating Temperature : -5 to 60 °C  
Storage Temperature : -25 to 65 °C  
Operating Altitude : 0 to 2,000 m  
Storage Altitude : 0 to 15,000 m  
Humidity : 8 to 95% RH, non-condensing

**3-Phase 400V 16A / 32A Meter Features ( MK meter )**  
Local Display : Hotswappable 1.8" Color LCD  
Phase level x 3 : Current ( A ), Phase Voltage ( V ), Energy ( kW ), Power Factor & Frequency ( Hz )  
Accuracy : Billing Grade +/-1%

EMC Compliance : CE / EMC  
Safety Compliance : CE / LVD & UKCA  
Tested to EN 62368-1:2014 / A11:2017 standard  
Tested to EN 60730-1:2016 / A1:2019 standard  
Environment Compliance : RoHS3 & REACH

**AUSTIN HUGHES** Design. Manufacturing. Global Services.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2024 Austin Hughes Electronics Ltd. All rights reserved.

Product Dimension : 56 (W) x 55 (D) x 1420 (H) mm  
Packing dimension : 110 (W) x 268 (D) x 1793 (H) mm