


Circuit Details :
20A NEMA L6-20R connector



208V model	Inlet x 2	Cordset x 2	20A MCB
ATS-H1L620R-20A-W_L620	20 Amp NEMA L6-20P	9.8ft 12AWG H05V V-F	1
ATS-H1L620R-20A-B_L620			

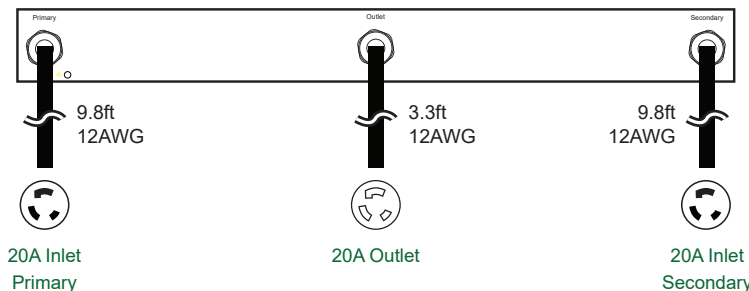

Specification	
Operating Temperature	: -5 to 60 °C
Storage Temperature	: -25 to 65 °C
Operating Altitude	: 0 to 2,000 m
Storage Altitude	: 0 to 15,000 m
Humidity (non-condensing)	: 8 to 95% RH
Nominal input volt.	: 110V
Acceptable input volt.	: ±10% nominal
Input frequency	: 50 / 60Hz
Transfer time	: 10 ms typical
Electrical endurance	: 1 x 10 ⁵ operations
Power consumption	: Approx. 20W
Chassis Material / Color	: Steel / Black
Product Dimension	: 17.4W x 11.8D x 1.7H (inch)
Packing Dimension	: 19.7W x 21.7D x 5.9H (inch)
Net / Gross Weight	: 12.5 lbs / 13.6 lbs

Meter Features	W ATS	B ATS
Local Display	: 2.0" color touch LCD	3-digit LED
Bank Measurement	: Volt, Amp, kWh & Power Factor	Same as W
Accuracy	: ±1% Billing-grade	Same as W
IP Access	: Embedded IP with Gigabit Ethernet port Enterprise IP Authentication, LDAPv3 / LDAPS, Active Directory®, RADIUS protocol	Same as W
SNMP	: V2 / V3 & GUI	Same as W

EMC Certificates	
FCC	: FCC 47 CFR Part 15 Subpart B, ICES-003 Issue 7
Safety Certificates	
CB	: IEC 62368-1:2014
UL-US	: UL 62368-1, 2nd Ed., Issue Date: 2014-12-01
UL-CA	: CSA C22.2 No. 62368-1-14, 2nd Ed., Issue Date: 2014-12-01
Environment : RoHS, Reach & WEEE	