



Unit : inch

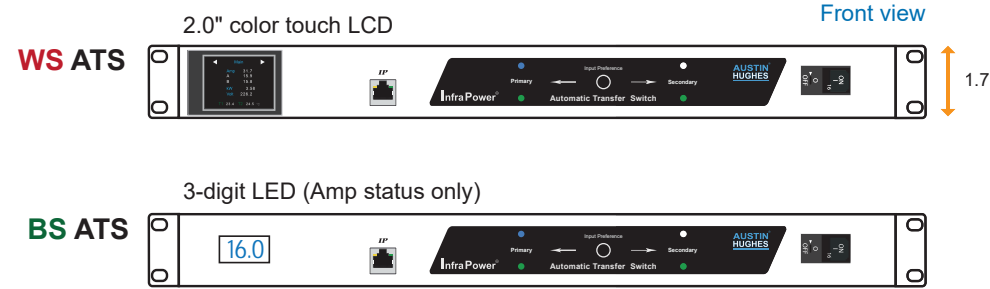

Circuit Details :  
20A NEMA L6-20R connector

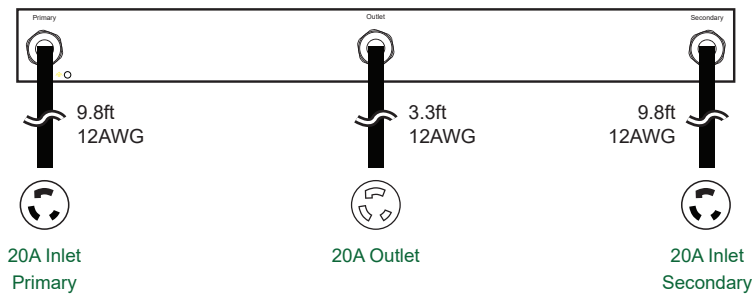

208V model	Inlet x 2	Cordset x 2	20A MCB
ATS-H1L620R-20A-WS_L620	20 Amp NEMA L6-20P	9.8ft 12AWG H05V V-F	1
ATS-H1L620R-20A-BS_L620			



Specification	
Operating Temperature : -5 to 60 °C	Nominal input volt. : 110V
Storage Temperature : -25 to 65 °C	Acceptable input volt. : ±10% nominal
Operating Altitude : 0 to 2,000 m	Input frequency : 50 / 60Hz
Storage Altitude : 0 to 15,000 m	Transfer time : 10 ms typical
Humidity (non-condensing) : 8 to 95% RH	Electrical endurance : 1 x 10 <sup>5</sup> operations
	Power consumption : Approx. 20W
Chassis Material / Color : Steel / Black	
Product Dimension : 17.4W x 11.8D x 1.7H (inch)	
Packing Dimension : 19.7W x 21.7D x 5.9H (inch)	
Net / Gross Weight : 12.5 lbs / 13.6 lbs	

Meter Features	WS ATS	BS ATS
Local Display	: 2.0" color touch LCD	: 3-digit LED
Bank Measurement	: Volt, Amp, kWh & Power Factor	: Same as WS
Outlet Control	: Outlet Switch ON / OFF	: Same as WS
Accuracy	: ±1% Billing-grade	: Same as WS
IP Access	: Embedded IP with Gigabit Ethernet port Enterprise IP Authentication, LDAPv3 / LDAPS, Active Directory®, RADIUS protocol	: Same as WS
SNMP	: V2 / V3 & GUI	: Same as WS

EMC Certificates	
FCC	: FCC 47 CFR Part 15 Subpart B, ICES-003 Issue 7
Safety Certificates	
CB	: IEC 62368-1:2014
UL-US	: UL 62368-1, 2nd Ed., Issue Date: 2014-12-01
UL-CA	: CSA C22.2 No. 62368-1-14, 2nd Ed., Issue Date: 2014-12-01
<b>Environment</b>	: RoHS, Reach & WEEE