




Unit : inch

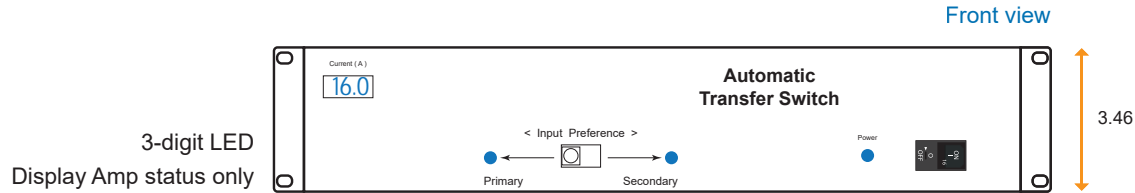

3-digit LED Display Amp status only

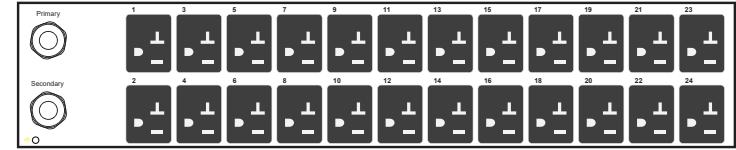

US outlet x 24

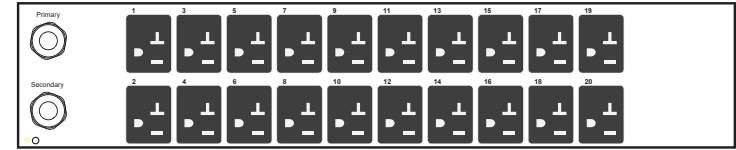

US outlet x 20

110V model	US outlet #	Inlet x 2	Cordset x 2	20A MCB
ATS-H24US-20A_L520	24	20 Amp NEMA L5-20P	9.8ft 12AWG UL	1
ATS-H20US-20A_L520	20			

110V model	US outlet #	Inlet x 2	Cordset x 2	20A MCB
ATS-H24US-20A_520	24	20 Amp NEMA 5-20P	9.8ft 12AWG UL	1
ATS-H20US-20A_L20	20			



Specification		Meter Features	EMC Certificates
Operating Temperature : -5 to 60 °C	Nominal input volt. : 110V	Local Display : 3-digit LED ammeter measuring input load current	FCC : FCC 47 CFR Part 15 Subpart B, ICES-003 Issue 7
Storage Temperature : -25 to 65 °C	Acceptable input volt. : ±10% nominal	Measurement : Current (A)	Safety Certificates
Operating Altitude : 0 to 2,000 m	Input frequency : 50 / 60Hz	Accuracy : ± (3% of the reading + 5 digits) RMS	CB : IEC 62368-1:2014
Storage Altitude : 0 to 15,000 m	Transfer time : 10 ms typical		UL-US : UL 62368-1, 2nd Ed., Issue Date: 2014-12-01
Humidity (non-condensing) : 8 to 95% RH	Electrical endurance : 1 x 10 ⁵ operations		UL-CA : CSA C22.2 No. 62368-1-14, 2nd Ed., Issue Date: 2014-12-01
	Power consumption : Approx. 20W		Environment : RoHS, Reach & WEEE
Chassis Material / Color : Steel / Black			
Product Dimension : 17.4W x 11.8D x 3.46H (inch)			
Packing Dimension : 21.7W x 21.7D x 5.9H (inch)			
Net / Gross Weight : 20.9 lbs / 22.0 lbs			