



Unit : inch

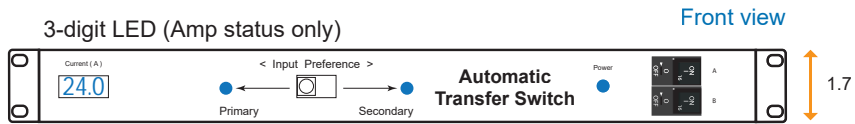

Circuit Details :
 < **Circuit A** > US # 1 - 6
 < **Circuit B** > US # 7 - 12

110V model	Inlet x 2	Cordset x 2	16A MCB
ATS-H12US-30A_L530	30 Amp NEMA L5-30P	9.8ft 10AWG UL	2

110V model	Inlet x 2	Cordset x 2	16A MCB
ATS-H12US-30A_530	30 Amp NEMA 5-30P	9.8ft 10AWG UL	2



Specification	
Operating Temperature : -5 to 60 °C	Nominal input volt. : 110V
Storage Temperature : -25 to 65 °C	Acceptable input volt. : ±10% nominal
Operating Altitude : 0 to 2,000 m	Input frequency : 50 / 60Hz
Storage Altitude : 0 to 15,000 m	Transfer time : 10 ms typical
Humidity (non-condensing) : 8 to 95% RH	Electrical endurance : 1 x 10 ⁵ operations
	Power consumption : Approx. 20W
Chassis Material / Color : Steel / Black	
Product Dimension : 17.4W x 11.8D x 1.7H (inch)	
Packing Dimension : 19.7W x 21.7D x 5.9H (inch)	
Net / Gross Weight : 12.5 lbs / 13.6 lbs	

Meter Features	
Local Display : 3-digit LED ammeter measuring input load current	
Measurement : Current (A)	
Accuracy : ± (3% of the reading + 5 digits) RMS	

EMC Certificates	
FCC	: FCC 47 CFR Part 15 Subpart B, ICES-003 Issue 7
Safety Certificates	
CB	: IEC 62368-1:2014
UL-US	: UL 62368-1, 2nd Ed., Issue Date: 2014-12-01
UL-CA	: CSA C22.2 No. 62368-1-14, 2nd Ed., Issue Date: 2014-12-01
Environment : RoHS, Reach & WEEE	