



Unit : inch

Front view


3-digit LED
Display Amp status only

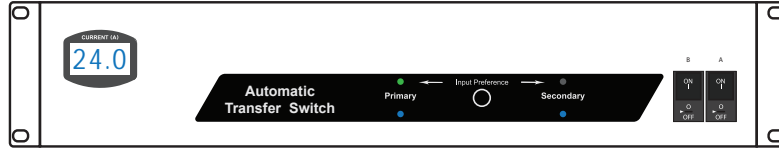


3.46

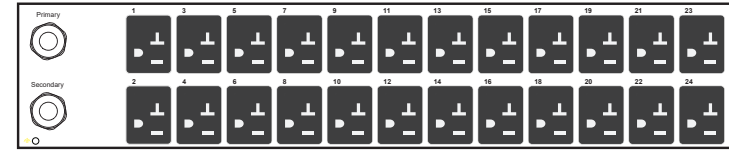

US outlet x 24

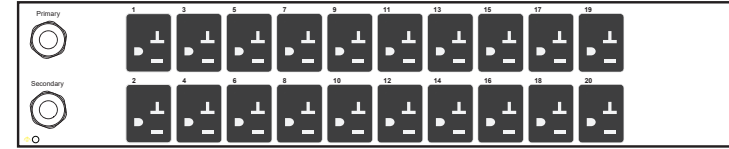

US outlet x 20

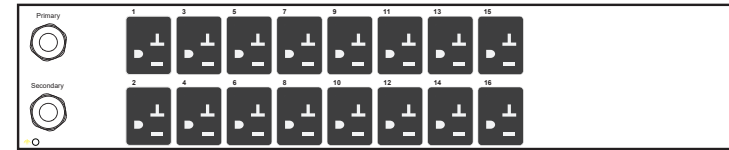

US outlet x 16

110V model	US outlet #	Inlet x 2	Cordset x 2	16A MCB
ATS-H24US-30A_L530	24	30 Amp NEMA L5-30P	9.8ft 10AWG UL	2
ATS-H20US-30A_L530	20			
ATS-H16US-30A_L530	16			

110V model	US outlet #	Inlet x 2	Cordset x 2	16A MCB
ATS-H24US-30A_530	24	30 Amp NEMA 5-30P	9.8ft 10AWG UL	2
ATS-H20US-30A_530	20			
ATS-H16US-30A_530	16			



Specification	
Operating Temperature	: -5 to 60 °C
Storage Temperature	: -25 to 65 °C
Operating Altitude	: 0 to 2,000 m
Storage Altitude	: 0 to 15,000 m
Humidity (non-condensing)	: 8 to 95% RH
Chassis Material / Color	: Steel / Black
Product Dimension	: 17.4W x 11.8D x 3.46H (inch)
Packing Dimension	: 21.7W x 21.7D x 5.9H (inch)
Net / Gross Weight	: 20.9 lbs / 22.0 lbs
Nominal input volt.	: 110V
Acceptable input volt.	: ±10% nominal
Input frequency	: 50 / 60Hz
Transfer time	: 10 ms typical
Electrical endurance	: 1 x 10 ⁵ operations
Power consumption	: Approx. 20W

Meter Features	
Local Display	: 3-digit LED ammeter measuring input load current
Measurement	: Current (A)
Accuracy	: ± (3% of the reading + 5 digits) RMS

EMC Certificates	
FCC	: FCC 47 CFR Part 15 Subpart B, ICES-003 Issue 7
Safety Certificates	
CB	: IEC 62368-1:2014
UL-US	: UL 62368-1, 2nd Ed., Issue Date: 2014-12-01
UL-CA	: CSA C22.2 No. 62368-1-14, 2nd Ed., Issue Date: 2014-12-01
Environment	: RoHS, Reach & WEEE