



Unit : mm



Circuit Details :  
output 16A max., 16A IEC60309 2P+E connector

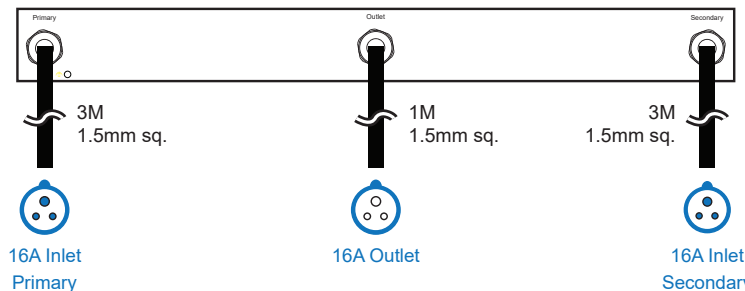

<b>230V</b> model	Inlet x 2	Cordset x 2	16A MCB
ATS-H1EN16A-16A_EN	16 Amp IEC 60309 2P+E	3M 1.5mm sq. H05V V-F	1



Specification	
Operating Temperature : -5 to 60 °C	Nominal input volt. : 230V
Storage Temperature : -25 to 65 °C	Acceptable input volt. : ±10% nominal
Operating Altitude : 0 to 2,000 m	Input frequency : 50 / 60Hz
Storage Altitude : 0 to 15,000 m	Transfer time : 10 ms typical
Humidity (non-condensing) : 8 to 95% RH	Electrical endurance : 1 x 10 <sup>5</sup> operations
	Power consumption : Approx. 20W
Chassis Material / Color : Steel / Black	
Product Dimension : 442W x 300D x 43.5H (mm)	
Packing Dimension : 500W x 540D x 150H (mm)	
Net / Gross Weight : 5.7 kg / 6.2 kg	

Meter Features
Local Display : 3-digit LED ammeter measuring input load current
Measurement : Current ( A )
Accuracy : ± ( 3% of the reading + 5 digits ) RMS

EMC Certificates
CE / EMC : EN55032:2015/A11:2020
EN IEC 61000-3-2:2019/A1:2021
EN61000-3-3:2013/A2:2021
EN55035:2017/A11:2020
Safety Certificates
CE/ LVD : EN 62368-1:2014, EN 62368-1:2014/A11:2017
CB : IEC 62368-1:2014
UKCA : BS EN 62368-1:2014+A11: 2017
UL-US : UL 62368-1, 2nd Ed., Issue Date: 2014-12-01
UL-CA : CSA C22.2 No. 62368-1-14, 2nd Ed., Issue Date: 2014-12-01
<b>Environment</b> : RoHS, Reach & WEEE