


230V model	Inlet x 2	Cordset x 2	30A MCB
ATS-H1EN32A-32A_EN	32 Amp IEC 60309 2P+E	3M 4.0mm sq. H05V V-F	1

Circuit Details :  
output 30A max., 32A IEC60309 2P+E connector

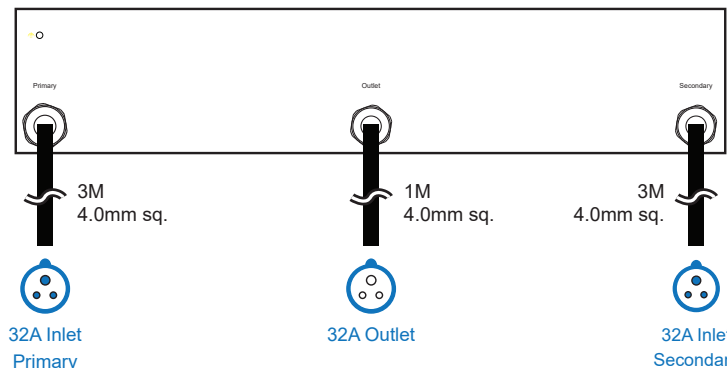

**Specification**

Operating Temperature : -5 to 60 °C  
 Storage Temperature : -25 to 65 °C  
 Operating Altitude : 0 to 2,000 m  
 Storage Altitude : 0 to 15,000 m  
 Humidity (non-condensing) : 8 to 95% RH

Nominal input volt. : 230V  
 Acceptable input volt. : ±10% nominal  
 Input frequency : 50 / 60Hz  
 Transfer time : 10 ms typical  
 Electrical endurance : 1 x 10<sup>5</sup> operations  
 Power consumption : Approx. 20W

Chassis Material / Color : Steel / Black  
 Product Dimension : 442W x 300D x 88H (mm)  
 Packing Dimension : 540W x 540D x 150H (mm)  
 Net / Gross Weight : 9.5 kg / 10.0 kg

**Meter Features**

Local Display : 3-digit LED ammeter measuring input load current  
 Measurement : Current (A)  
 Accuracy : ± ( 3% of the reading + 5 digits ) RMS

**EMC Certificates**

CE / EMC : EN55032:2015/A11:2020  
 EN IEC 61000-3-2:2019/A1:2021  
 EN61000-3-3:2013/A2:2021  
 EN55035:2017/A11:2020

**Safety Certificates**

CE/ LVD : EN 62368-1:2014, EN 62368-1:2014/A11:2017  
 CB : IEC 62368-1:2014  
 UKCA : BS EN 62368-1:2014+A11: 2017  
 UL-US : UL 62368-1, 2nd Ed., Issue Date: 2014-12-01  
 UL-CA : CSA C22.2 No. 62368-1-14, 2nd Ed., Issue Date: 2014-12-01

**Environment** : RoHS, Reach & WEEE