



Front view

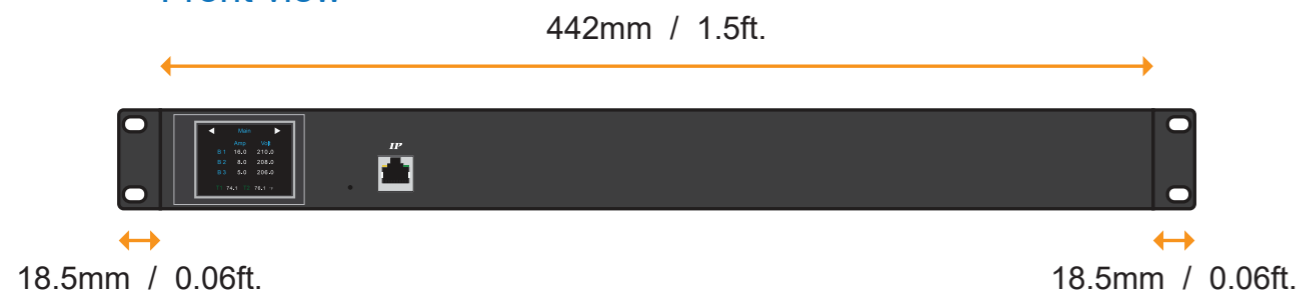

Rear view

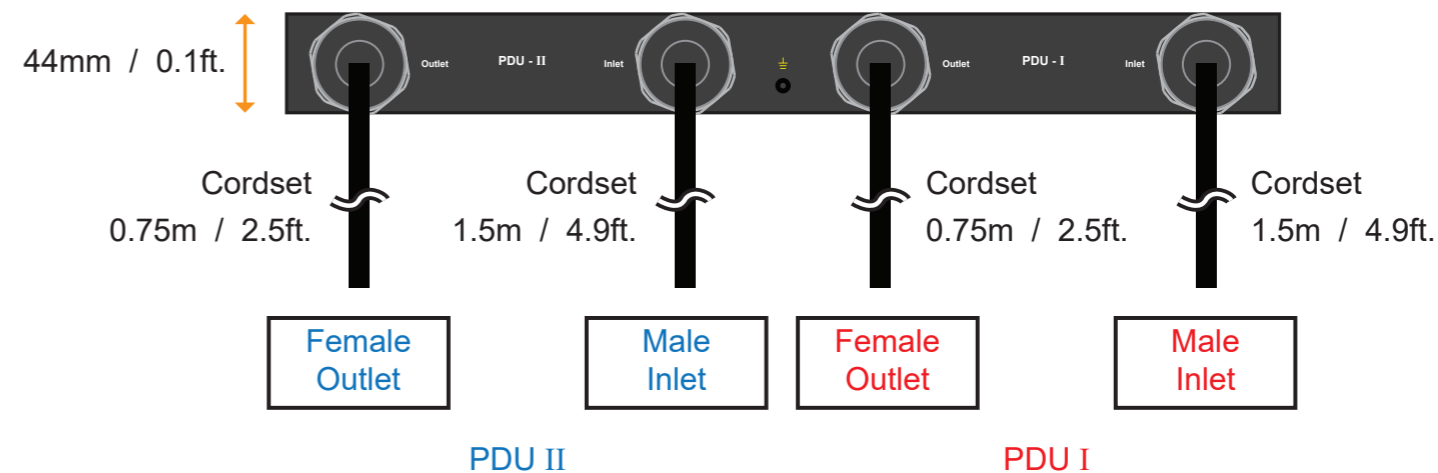

| 208V model             | Female Outlet x 2       | Cordset x 2 | Male Inlet x 2          | Cordset x 2 |
|------------------------|-------------------------|-------------|-------------------------|-------------|
| <b>DPW-60A_EN5p</b>    | 60A<br>IEC 60309 3P+N+E | 6AWG UL     | 60A<br>IEC 60309 3P+N+E | 6AWG UL     |
| <b>DPW-60A_EN4p</b>    | 60A<br>IEC 60309 3P+E   | 6AWG UL     | 60A<br>IEC 60309 3P+E   | 6AWG UL     |
| <b>DPW-50A_CS8365C</b> | 50A<br>CS8364           | 6AWG UL     | 50A<br>CS8365           | 6AWG UL     |

| 400V model        | Female Outlet x 2       | Cordset x 2            | Male Inlet x 2          | Cordset x 2            |
|-------------------|-------------------------|------------------------|-------------------------|------------------------|
| <b>DPW-63A_EN</b> | 63A<br>IEC 60309 3P+N+E | 10.0mm sq.<br>H05V V-F | 63A<br>IEC 60309 3P+N+E | 10.0mm sq.<br>H05V V-F |



| Specification             |  |
|---------------------------|--|
| Operating Temperature     | : -5 to 60 °C  |
| Storage Temperature       | : -25 to 65 °C   |
| Operating Altitude        | : 0 to 2,000 m   |
| Storage Altitude          | : 0 to 15,000 m  |
| Humidity (non-condensing) | : 8 to 95% RH  |
| Chassis Material / Color  | : Steel / Black  |
| Product Dimension         | : 442W x 350D x 44H (mm)<br>17.4W x 13.8D x 1.73H (inch) |
| Packing Dimension         | : -  |
| Net / Gross Weight        | : -  |

| Meter Features   |  |
|------------------|--|
| Local Display    | : Field replaceable 2.0" color LCD with touchscreen  |
| Bank Measurement | : Current ( A ), Energy ( kWh ), Voltage ( V ) & Power factor  |
| Accuracy         | : ±1% Billing-grade  |
| IP Access        | : Embedded LAN IP<br>Gigabit Ethernet standard<br>Enterprise IP Authentication, LDAPv3 / LDAPS<br>Active Directory®, RADIUS protocol |
| Cascade          | : Up to 32 PDU under single IP address   |
| SNMP             | : V2 / V3 & GUI  |

| EMC Certificates    |   |
|---------------------|---|
| FCC                 | : FCC Part 15 Subpart B, ANSI C63.4-2014                |
| CE / EMC            | : EN61326-1, EN61326-2-2:2013, EN61000-3-2, EN61000-3-3 |
| Safety Certificates |   |
| CE / LVD            | : EN 61010-1:2010                                       |
| CB                  | : IEC 62368-1:2018                                      |
| UL-US               | : UL 62368-1, 3rd Ed : 2021                             |
| UL-CA               | : CAN / CSA C22.2 No. 62368-1:19, 3rd Ed : 2021         |
| Environment         | : RoHS, Reach & WEEE                                    |