



Front view

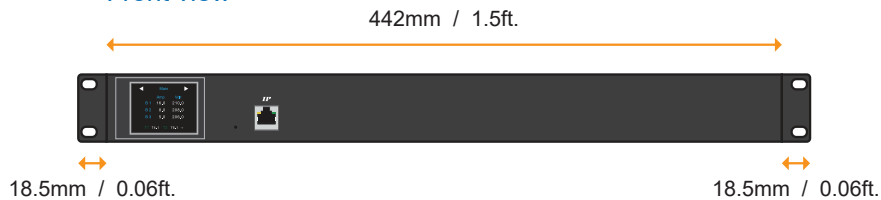

Rear view

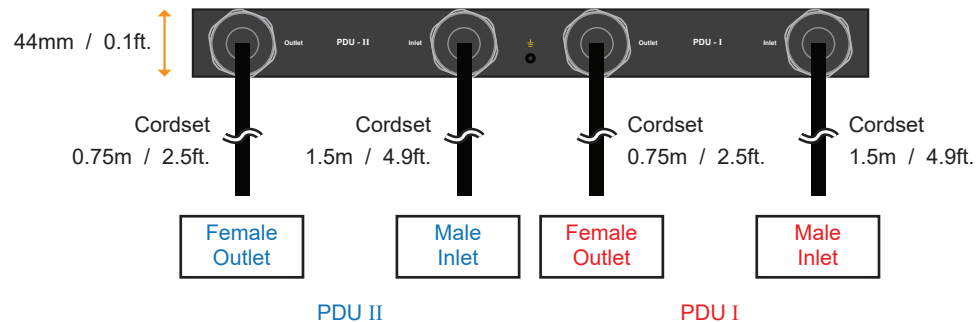

208V model	Female Outlet x 2	Cordset x 2	Male Inlet x 2	Cordset x 2
DPW-60A_EN5p	60A IEC 60309 3P+N+E	6AWG UL	60A IEC 60309 3P+N+E	6AWG UL
DPW-60A_EN4p	60A IEC 60309 3P+E	6AWG UL	60A IEC 60309 3P+E	6AWG UL
DPW-50A_CS8365C	50A CS8364	6AWG UL	50A CS8365	6AWG UL

400V model	Female Outlet x 2	Cordset x 2	Male Inlet x 2	Cordset x 2
DPW-63A_EN	63A IEC 60309 3P+N+E	10.0mm sq. H05V V-F	63A IEC 60309 3P+N+E	10.0mm sq. H05V V-F

US LISTED Safety certificates for UL-US & UL-CA are **NOT** applied to all 400V models



Specification	
Operating Temperature	: -5 to 60 °C
Storage Temperature	: -25 to 65 °C
Operating Altitude	: 0 to 2,000 m
Storage Altitude	: 0 to 15,000 m
Humidity (non-condensing)	: 8 to 95% RH
Chassis Material / Color	: Steel / Black
Product Dimension	: 442W x 350D x 44H (mm) 17.4W x 13.8D x 1.73H (inch)
Packing Dimension	: -
Net / Gross Weight	: -

Meter Features	
Local Display	: Field replaceable 2.0" color LCD with touchscreen
Bank Measurement	: Current (A), Energy (kWh), Voltage (V) & Power factor
Accuracy	: ±1% Billing-grade
IP Access	: Embedded LAN IP Gigabit Ethernet standard Enterprise IP Authentication, LDAPv3 / LDAPS Active Directory®, RADIUS protocol
Cascade	: Up to 32 PDU under single IP address
SNMP	: V2 / V3 & GUI

EMC Certificates	
FCC	: FCC Part 15 Subpart B, ANSI C63.4-2014
CE / EMC	: EN61326-1, EN61326-2-2:2013, EN61000-3-2, EN61000-3-3
Safety Certificates	
CE / LVD	: EN 61010-1:2010
CB	: IEC 62368-1:2018
UL-US	: UL 62368-1, 3rd Ed : 2021
UL-CA	: CAN / CSA C22.2 No. 62368-1:19, 3rd Ed : 2021
Environment	: RoHS, Reach & WEEE