


WS ATS

2.0" color touch LCD
Display Volt, Amp & kWh status

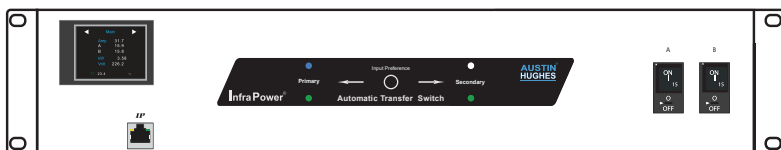


Front view


88mm

BS ATS

3-digit LED
Display Amp status only

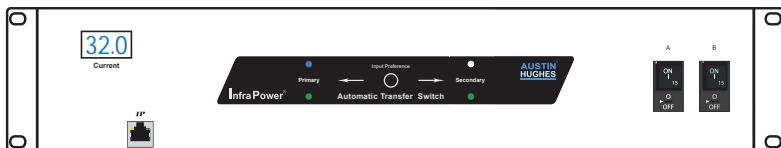

C13 outlet x 20 +
C19 outlet x 4

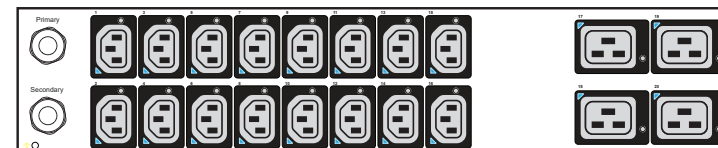

C13 outlet x 16 +
C19 outlet x 4

208V model	C13 + C19 #	Inlet x 2	Cordset x 2	16A MCB
ATS-H20C13/4C19-30A-WS_L630 ATS-H20C13/4C19-30A-BS_L630	20 + 4	 30 Amp NEMA L6-30P	9.8ft 10AWG UL	2
ATS-H16C13/4C19-30A-WS_L630 ATS-H16C13/4C19-30A-BS_L630	16 + 4			

230V model	C13 + C19 #	Inlet x 2	Cordset x 2	16A MCB
ATS-H20C13/4C19-32A-WS_EN ATS-H20C13/4C19-32A-BS_EN	20 + 4	 32 Amp IEC 60309 2P+E	3M 4.0mm sq. H05V V-F	2
ATS-H16C13/4C19-32A-WS_EN ATS-H16C13/4C19-32A-BS_EN	16 + 4			



Specification

Operating Temperature : -5 to 60 °C	Nominal input volt. : 208V / 230V
Storage Temperature : -25 to 65 °C	Acceptable input volt. : ±10% nominal
Operating Altitude : 0 to 2,000 m	Input frequency : 50 / 60Hz
Storage Altitude : 0 to 15,000 m	Transfer time : 10 ms typical
Humidity (non-condensing) : 8 to 95% RH	Electrical endurance : 1 x 10 ⁵ operations
	Power consumption : Approx. 20W

Chassis Material / Color : Steel / Black
Product Dimension : 442W x 300D x 88H (mm) / 17.4W x 11.8D x 3.46H (inch)
Packing Dimension : 540W x 540D x 150H (mm) / 21.7W x 21.7D x 5.9H (inch)
Net / Gross Weight : 9.5 kg / 10.0 kg / 20.9 lbs / 22.0 lbs

Meter Features

	WS ATS	BS ATS
Local Display	: 2.0" color touch LCD	: 3-digit LED
Bank Measurement	: Volt, Amp, kWh & Power Factor	: Same as WS
Outlet Control	: Outlet Switch ON / OFF	: Same as WS
Accuracy	: ±1% Billing-grade	: Same as WS
IP Access	: Embedded IP with Gigabit Ethernet port Enterprise IP Authentication, LDAPv3 / LDAPS, Active Directory®, RADIUS protocol	: Same as WS
SNMP	: V2 / V3 & GUI	: Same as WS

EMC Certificates

FCC	: FCC 47 CFR Part 15 Subpart B, ICES-003 Issue 7
CE / EMC	: EN55032:2015/A11:2020 EN IEC 61000-3-2:2019/A1:2021 EN61000-3-3:2013/A2:2021 EN55035:2017/A11:2020

Safety Certificates

CE / LVD	: EN 62368-1:2014, EN 62368-1:2014/A11:2017
CB	: IEC 62368-1:2014
UKCA	: BS EN 62368-1:2014+A11: 2017
UL-US	: UL 62368-1, 2nd Ed., Issue Date: 2014-12-01
UL-CA	: CSA C22.2 No. 62368-1-14, 2nd Ed., Issue Date: 2014-12-01

Environment : RoHS, Reach & WEEE