


230V model	Inlet x 2	Cordset x 2	16A MCB
ATS-H2EN16A-32A_EN	32 Amp IEC 60309 2P+E	3M 4.0mm sq. H05V V-F	2

Circuit Details :

< **Circuit A** > output 16A max. Outlet I

< **Circuit B** > output 16A max. Outlet II

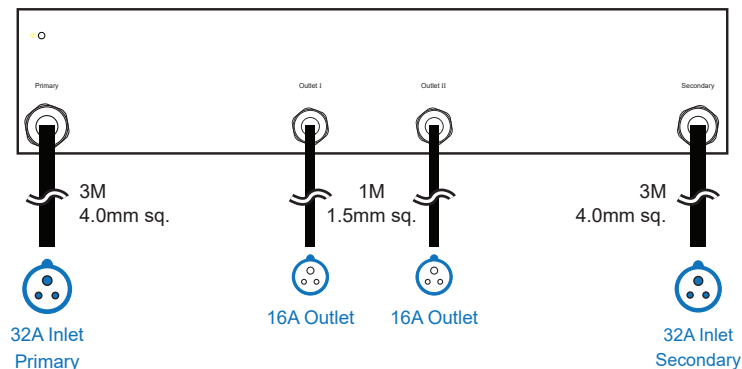

Specification

Operating Temperature	: -5 to 60 °C	Nominal input volt.	: 230V
Storage Temperature	: -25 to 65 °C	Acceptable input volt.	: ±10% nominal
Operating Altitude	: 0 to 2,000 m	Input frequency	: 50 / 60Hz
Storage Altitude	: 0 to 15,000 m	Transfer time	: 10 ms typical
Humidity (non-condensing)	: 8 to 95% RH	Electrical endurance	: 1 x 10 ⁵ operations
		Power consumption	: Approx. 20W

Chassis Material / Color	: Steel / Black
Product Dimension	: 442W x 300D x 88H (mm)
Packing Dimension	: 540W x 540D x 150H (mm)
Net / Gross Weight	: 9.5 kg / 10.0 kg

Meter Features

Local Display	: 3-digit LED ammeter measuring input load current
Measurement	: Current (A)
Accuracy	: ± (3% of the reading + 5 digits) RMS

EMC Certificates

CE / EMC	: EN55032:2015/A11:2020
	: EN IEC 61000-3-2:2019/A1:2021
	: EN61000-3-3:2013/A2:2021
	: EN55035:2017/A11:2020

Safety Certificates

CE/ LVD	: EN 62368-1:2014, EN 62368-1:2014/A11:2017
CB	: IEC 62368-1:2014
UKCA	: BS EN 62368-1:2014+A11: 2017
UL-US	: UL 62368-1, 2nd Ed., Issue Date: 2014-12-01
UL-CA	: CSA C22.2 No. 62368-1-14, 2nd Ed., Issue Date: 2014-12-01

Environment : RoHS, Reach & WEEE