


Unit : mm

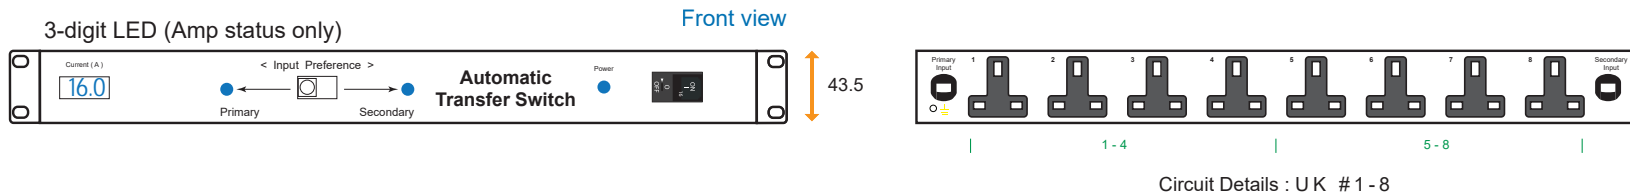

230V model	Inlet x 2	Cordset x 2	16A MCB
ATS-H8UK-16A_EN	16 Amp IEC 60309 2P+E	3M 1.5mm sq. H05V V-F	1

230V model	Inlet x 2	Cordset x 2	13A MCB
ATS-H8UK-13A_BS	13 Amp BS1363 (fused)	3M 1.5mm sq. H05V V-F	1

230V model	Inlet x 2	Cordset x 2	16A MCB
ATS-H8UK-16A_C20	16 Amp IEC320 C20	3M 1.5mm sq. H05V V-F	1

230V model	Inlet x 2	Cordset x 2	10A MCB
ATS-H8UK-10A_C14	10 Amp IEC320 C14	3M 1.5mm sq. H05V V-F	1



**Specification**

Operating Temperature	: -5 to 60 °C	Nominal input volt.	: 230V
Storage Temperature	: -25 to 65 °C	Acceptable input volt.	: ±10% nominal
Operating Altitude	: 0 to 2,000 m	Input frequency	: 50 / 60Hz
Storage Altitude	: 0 to 15,000 m	Transfer time	: 10 ms typical
Humidity (non-condensing)	: 8 to 95% RH	Electrical endurance	: 1 x 10 <sup>5</sup> operations
		Power consumption	: Approx. 20W

Chassis Material / Color	: Steel / Black
Product Dimension	: 442W x 300D x 43.5H (mm)
Packing Dimension	: 500W x 540D x 150H (mm)
Net / Gross Weight	: 5.7 kg / 6.2 kg

**Meter Features**

Local Display	: 3-digit LED ammeter measuring input load current
Measurement	: Current ( A )
Accuracy	: ± ( 3% of the reading + 5 digits ) RMS

**EMC Certificates**

CE / EMC	: EN55032:2015/A11:2020
	: EN IEC 61000-3-2:2019/A1:2021
	: EN61000-3-3:2013/A2:2021
	: EN55035:2017/A11:2020

**Safety Certificates**

CE/ LVD	: EN 62368-1:2014, EN 62368-1:2014/A11:2017
CB	: IEC 62368-1:2014
UKCA	: BS EN 62368-1:2014+A11: 2017
UL-US	: UL 62368-1, 2nd Ed., Issue Date: 2014-12-01
UL-CA	: CSA C22.2 No. 62368-1-14, 2nd Ed., Issue Date: 2014-12-01

**Environment** : RoHS, Reach & WEEE